


ROLLSTER™ | ROLL OFF DUMP (DR) & DUMP BED (KD)



- Length: 14' | Couplers: Gooseneck, Bumper-pull, & Pintle
- GVWR: 15,680 lbs (Gooseneck) / Load Capacity: 9,400 lbs (14 ft GN)
- Weight: 6,280 lbs 14' Gooseneck / 4,000 lbs Trailer (DR) / 2,280 lbs Dump Bed (KD)

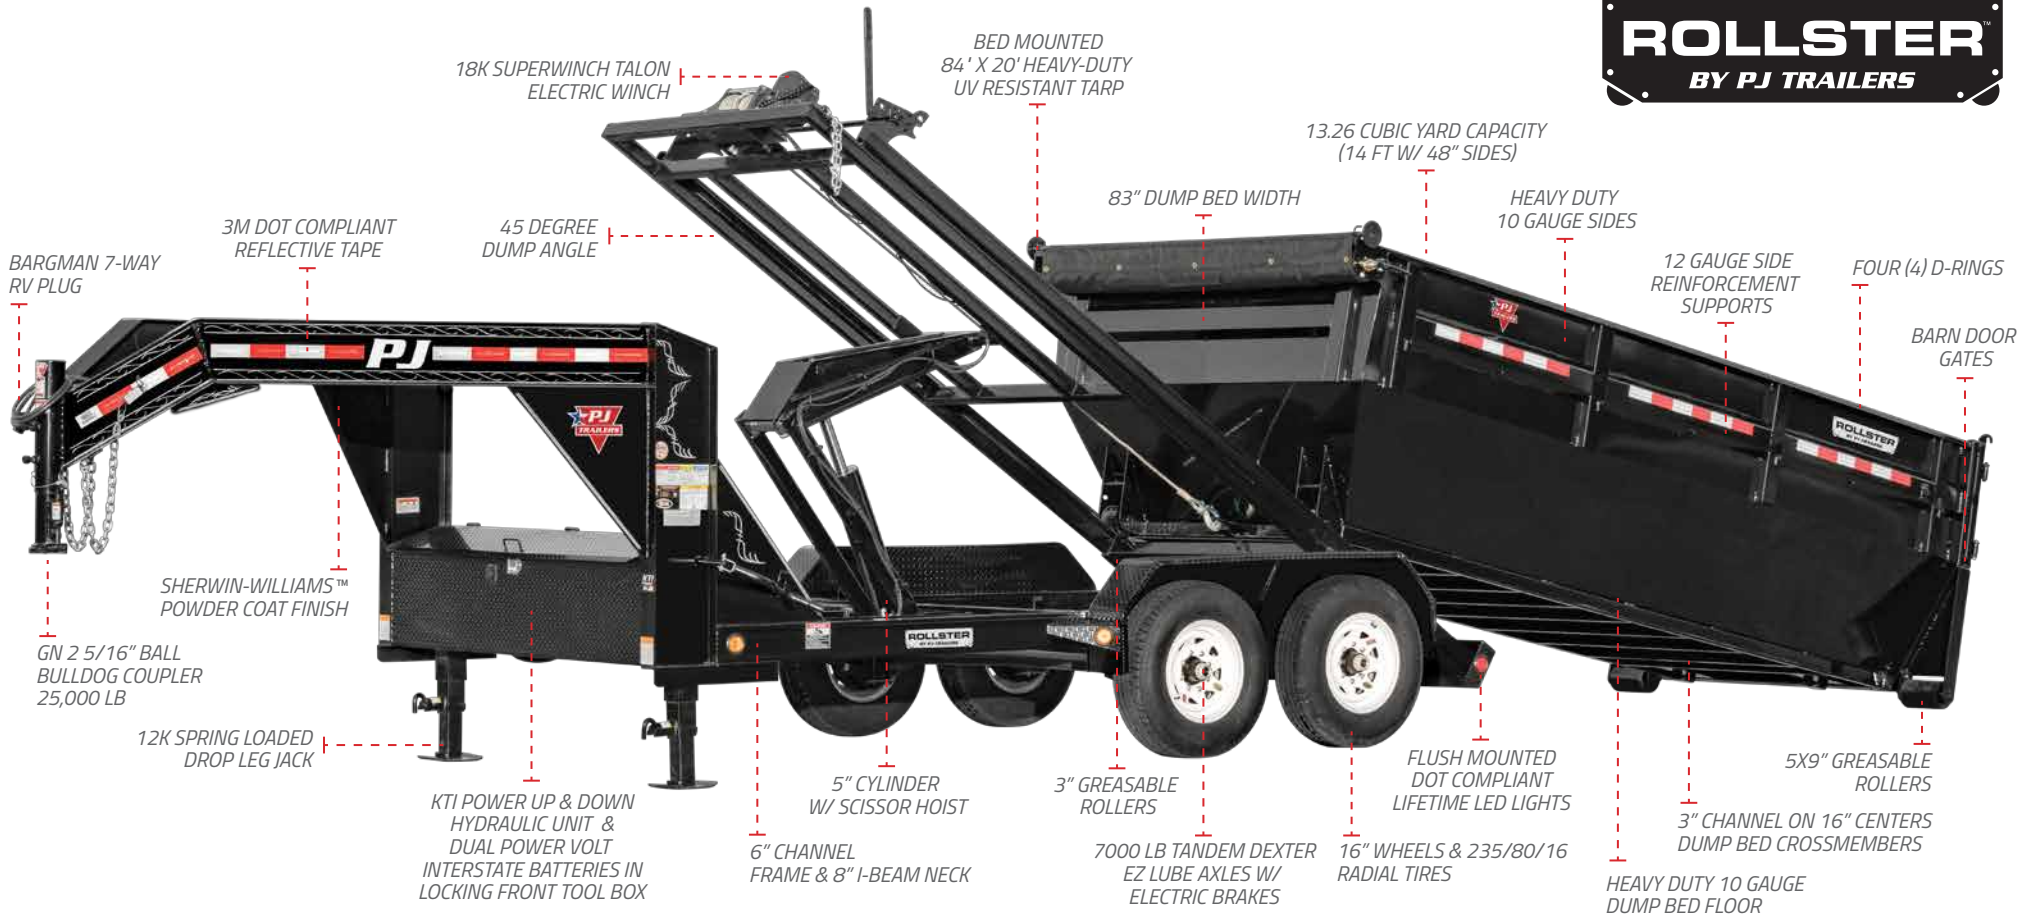

Inframe Rollers

Our 3" inframe Greasable rollers reduce friction and maximize battery life, giving you more loads/unloads between having to recharge.



SuperWinch

At the core of the Superwinch Talon 18.0, is a sealed 6 HP Series Wound motor, matched with a 2-Stage Planetary and 2-Stage Spur Gearbox giving it a rated line pull of 18,000 lbs.



Dual Batteries

With a dual battery setup, these PowerVolt industrial deep-cycle batteries are perfectly suited for maximum load applications! Rated with a higher Amp Hour, these Group 27 batteries will give you more loads and unloads in the field.

13.26 CUBIC YARD CAPACITY (14 FT)	14k BASE GVWR	BULLDOG- COUPLER	6" CHANNEL FRAME	10 GAUGE BED & SIDES	48" 4 FT SIDES	10 PLY 235/80/R16 RADIAL TIRES	DEXTER AXLE DEXTER EZ-LUBE AXLES	83" SUPER-WIDE DECK	16" CROSSMEMBER CENTERS	45° DUMP ANGLE	SCISSOR HOIST	INTERSTATE BATTERIES DUAL DEEP CYCLE BATTERY	Bargman 7-WAY RV PLUG	LED LIFETIME LED LIGHTS	SHERWIN WILLIAMS POWDER COAT	SUPERWINCH HEAVY-DUTY WINCH
---	------------------	---------------------	------------------------	----------------------------	-------------------	--------------------------------------	--	---------------------------	-------------------------------	-------------------	------------------	---	--------------------------	-------------------------------	------------------------------------	-----------------------------------